



# StreamBlade™ MiniFX DATA SHEET

## FEATURE SUMMARY

- Xilinx XC4VFX60/40/20 FPGA
- Two PowerPC 405 Cores (450 MHz)
- 10/100/1000 Ethernet Port
- 32M x 32 bits DDR2 SDRAM
- I/O Connector with 36 LVDS capable differential pairs
- Two expansion connectors with 33 LVDS capable differential pairs
- 25MHz and 100MHz Oscillators
- Serial Data Connector (SATA) with 2 LVDS capable differential pairs
- 64MB Flash Memory
- Two Serial (RS-232)

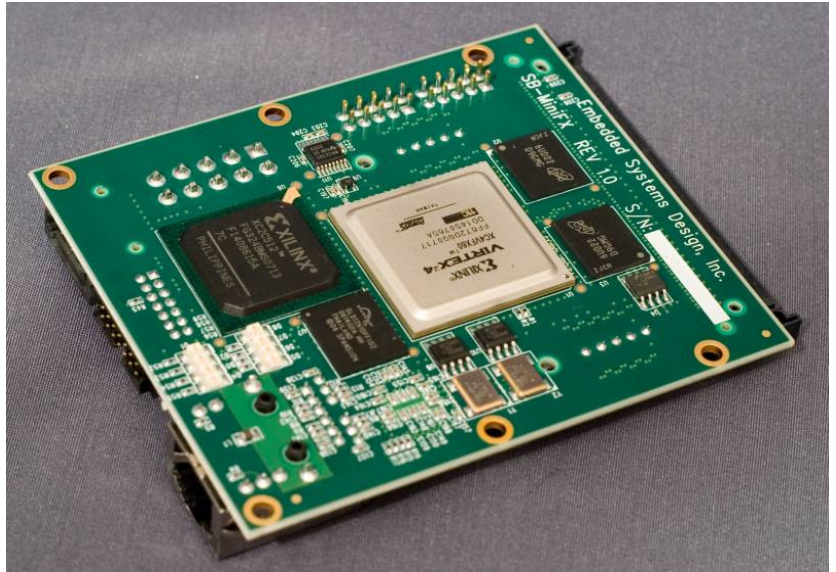

## MINIFX BLOCK DIAGRAM

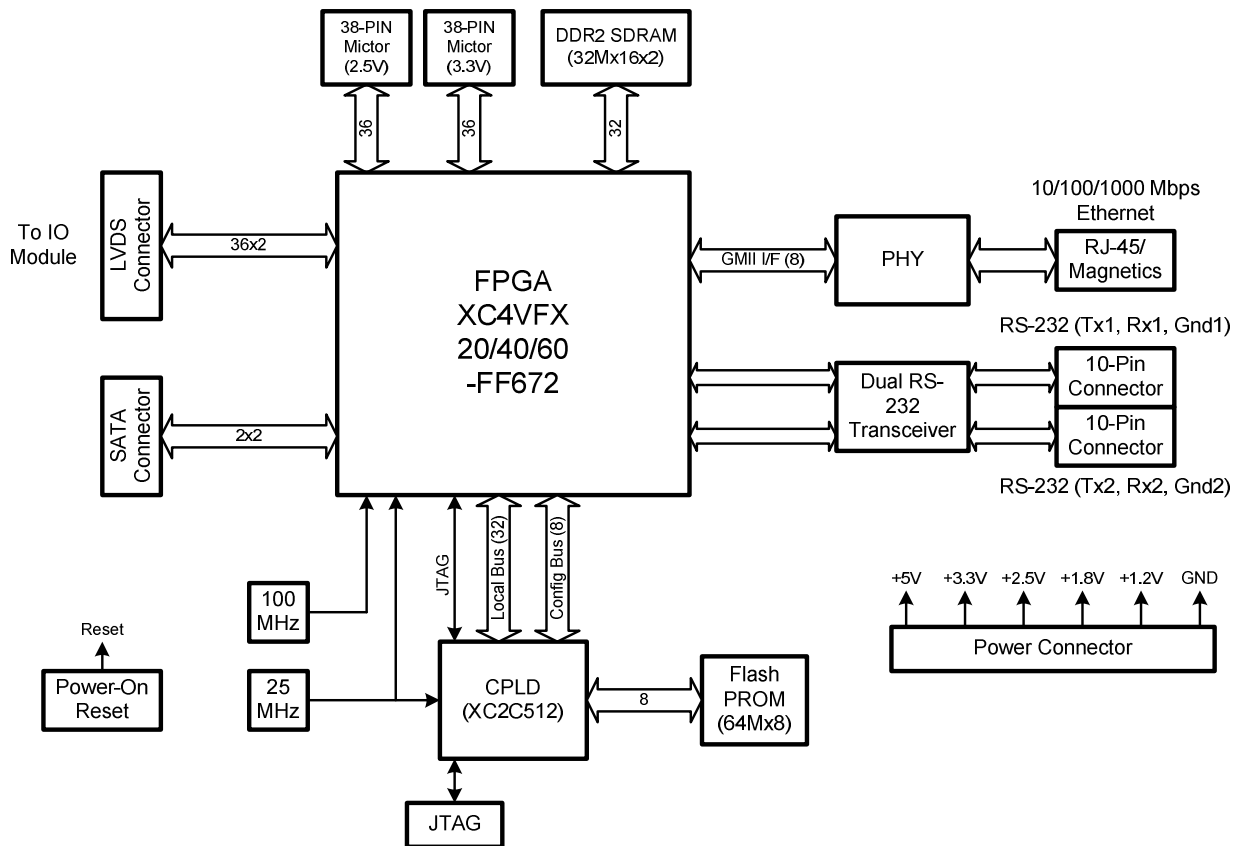

The Embedded Systems Design, Inc. (ESD) StreamBlade™ MiniFX single board computer is a Xilinx Virtex-4 FX FPGA based design enabling the integration of high performance compute and signal processing functions on to a small form factor circuit card.




## MINIFX SPECIFICATIONS

Feature	Function	Detail
Form Factor	Card Dimension	3.5" x 3.0", 88.9 mm x 76.2

## ORDERING INFORMATION

Call for pricing and availability: (410) 712-7290.

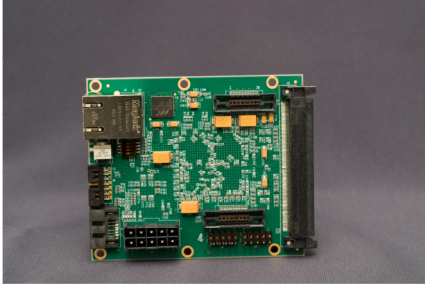

©2007 StreamBlade, StreamBed, and Stream Offload Engine are registered trademarks of Embedded Systems Design, Inc. All other trademarks are the properties of their respective owners. All specifications within this document are subject to change without notice.



Embedded Systems Design, Inc.  
6810 Deerpath Road, Suite 300  
Elkridge, MD 21075  
USA

Phone: (410) 712-7290  
Fax: (410) 712-7291  
www.embedded-sys.com  
www.ESD-StreamBlade.com

Feature	Function	Count	Detail
Interface	I/O	72/36	LVDS Capable
	Expansion	66/33	LVDS Capable
	Serial	4/2	LVDS Capable
Streaming Processors	FPGA	1	Xilinx XC4VFX60/40/20 FPGAs
	CPU	2	PowerPC 405 Cores (450 MHz Max)
Memory	DDR2 SDRAM	1	32M X 32 Bits (128M Bytes)
Non-Volatile Memory	Flash	1	64MB for FPGA Configuration and Power PC Code
I/O - Network	Ethernet	1	RJ-45 connectors with activity LEDs - Two per FPGA
			Tri-Mode Ethernet MAC Cores (IEEE Std 802.3-2002 compliant) - Two (usable) per FPGA
			Marvell 88E111 Gigabit Ethernet Transceiver
I/O - Additional	Serial	2	10-pin headers (RS-232 port)
	JTAG	1	4-pin header for FPGA/PPC Debug
Clocks	On-board Oscillators	2	25 MHz/100 MHz
Miscellaneous	LED	8	Four on FPGA/ Four on CPLD
	Switch	4	CPLD

Feature	Function	Value
Power	Quiescent	1.5 Watt
	Operational	4.0 Watt – 2 PPC on 1 FPGA max freq
Voltage	Board Supply	10-Pin Power connector with inputs for 5.0, 3.3, 2.5, 1.8, 1.2, and Ground
Environmental <sup>1</sup>	Temperature	0°C to 70°C - operational
		-40°C to +85°C - storage
	Air Flow	-
	Shock	up to 10g at 10ms - operational
	Vibration	0.25g (5-100Hz) - operational
		2.0g (5-100Hz) - storage
Humidity	0-95% at 40°C non-condensing - operational	
	0-95% at 40°C non-condensing - storage	
Altitude	0-15000 ft (0-4572 m)	

<sup>1</sup> preliminary June 2007